


# ESaver-25H

## Product Number Configuration Guide

Product Number Example:

ESAVER-25H - 1 1 2 - 4 8 0 - 2 0 8 - N 3 H D - T105 - F 6 0 - 2 S - D L - D 2 -

For each category below, insert the appropriate values from between the quotation marks into the respective boxes to complete the model number for the transformer required for the application.

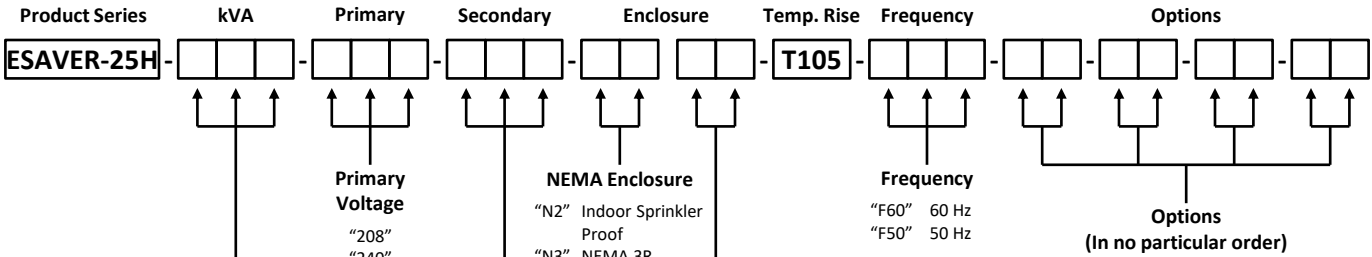

- kVA**
- "015" 15 kVA
  - "020" 20 kVA
  - "025" 25 kVA
  - "030" 30 kVA
  - "045" 45 kVA
  - "050" 50 kVA
  - "063" 63 kVA
  - "075" 75 kVA
  - "100" 100 kVA
  - "112" 112.5 kVA
  - "125" 125 kVA
  - "150" 150 kVA
  - "175" 175 kVA
  - "200" 200 kVA
  - "225" 225 kVA
  - "250" 250 kVA
  - "300" 300 kVA
  - "400" 400 kVA
  - "450" 450 kVA
  - "500" 500 kVA
  - "600" 600 kVA
  - "750" 750 kVA

- Secondary Voltage**
- "208" 208Y/120 V
  - "240" 240Y/139 V
  - "380" 380Y/220 V
  - "415" 415Y/240 V
  - "480" 480Y/277 V
  - "600" 600Y/347 V

- Internal Access**
- "HD" Hinged Doors
  - Blank Otherwise

- General Options**  
 (Select as many as are appropriate for the application.)
- "SC" Special Color (Standard Colors are Green, Black)
  - "LK" Lug Kit
  - "DL" Data Logger
  - "IR" Rotating InfraRed Port

- Electrostatic Shields**  
 (Select only one, as appropriate for the application.)
- "1S" 1 Electrostatic Shield
  - "2S" 2 Electrostatic Shields
  - "3S" 3 Electrostatic Shields

- Compliance Certification Test**  
 (Select only one, as appropriate for the application.)
- "ND" NonLinear & DOE 2016 Tests
  - "D2" DOE 2016 Test Only
  - "RT" Routine Test
  - Blank Otherwise

